




因改良等原因，规格以及外观有所变更时，不再另行通知，敬请谅解。

因改良等原因，规格以及外观有所变更时，不再另行通知，敬请谅解。

changed because of improvement thanks for your understanding






本款为磁性开关款



- 1.当操作夹爪工作时，请人员务必远离夹爪和机器人的活动部位，否则将会造成人身伤害的险；
- 2.由于不同物件有其不同的摩擦系数，当初次夹持工件时，请在空旷场地进行试夹，确保夹稳固后方可装机工作，否则将会有跌落工件砸伤机器或人员的风险

1. When operating the gripper, please keep away from it. Gripper and robot's moving parts, otherwise it will risk of personal injury;
2. Because different objects have different friction coefficients, When clamping the workpiece for the first time, please try clamping in an open field. Ensure that the clamping is firm before the machine can work, otherwise it will risk. There is a risk that falling workpieces may damage machines or personnel.

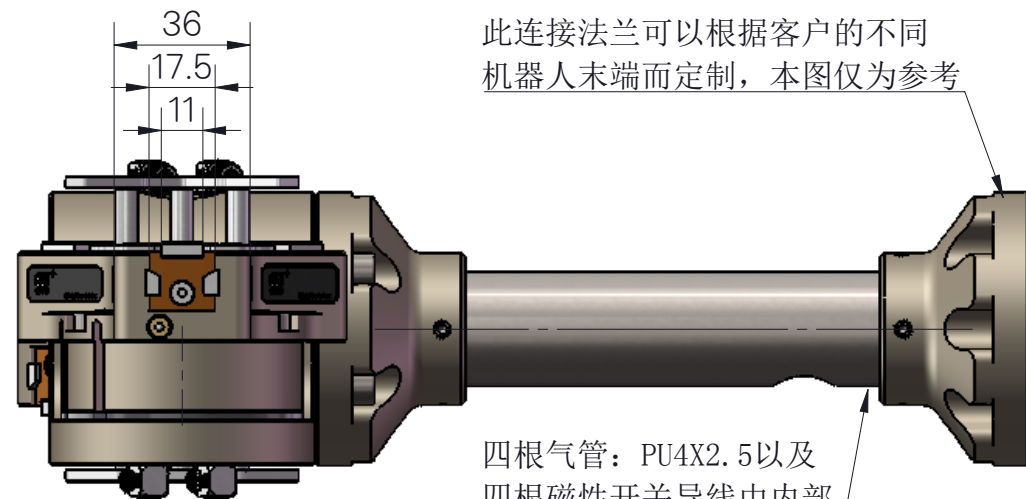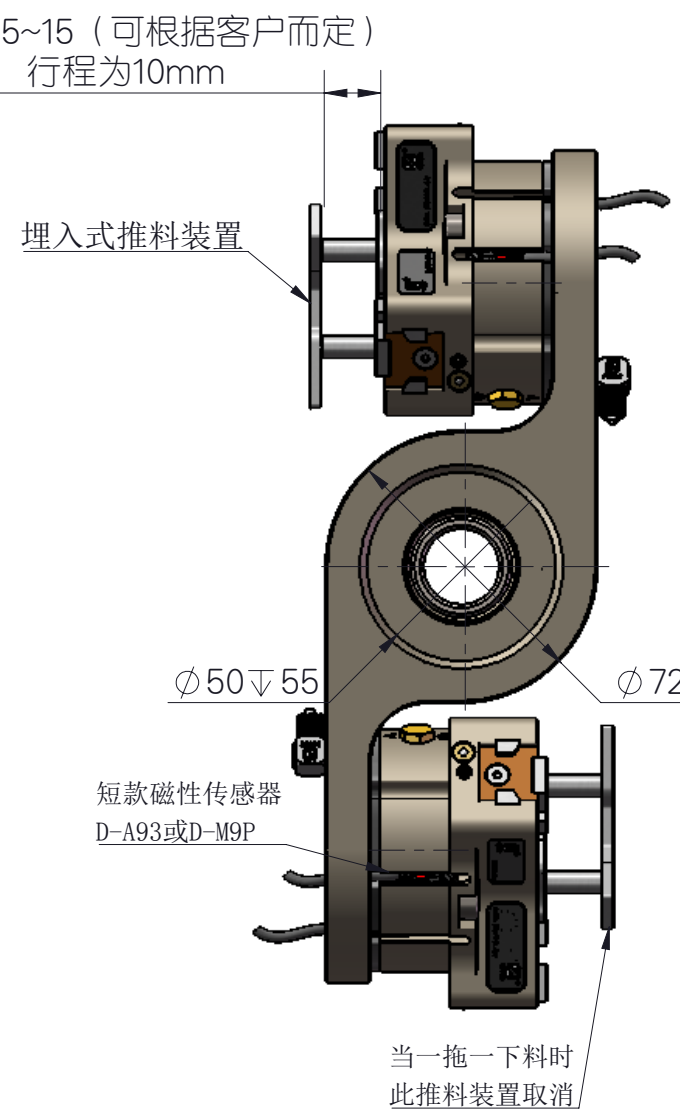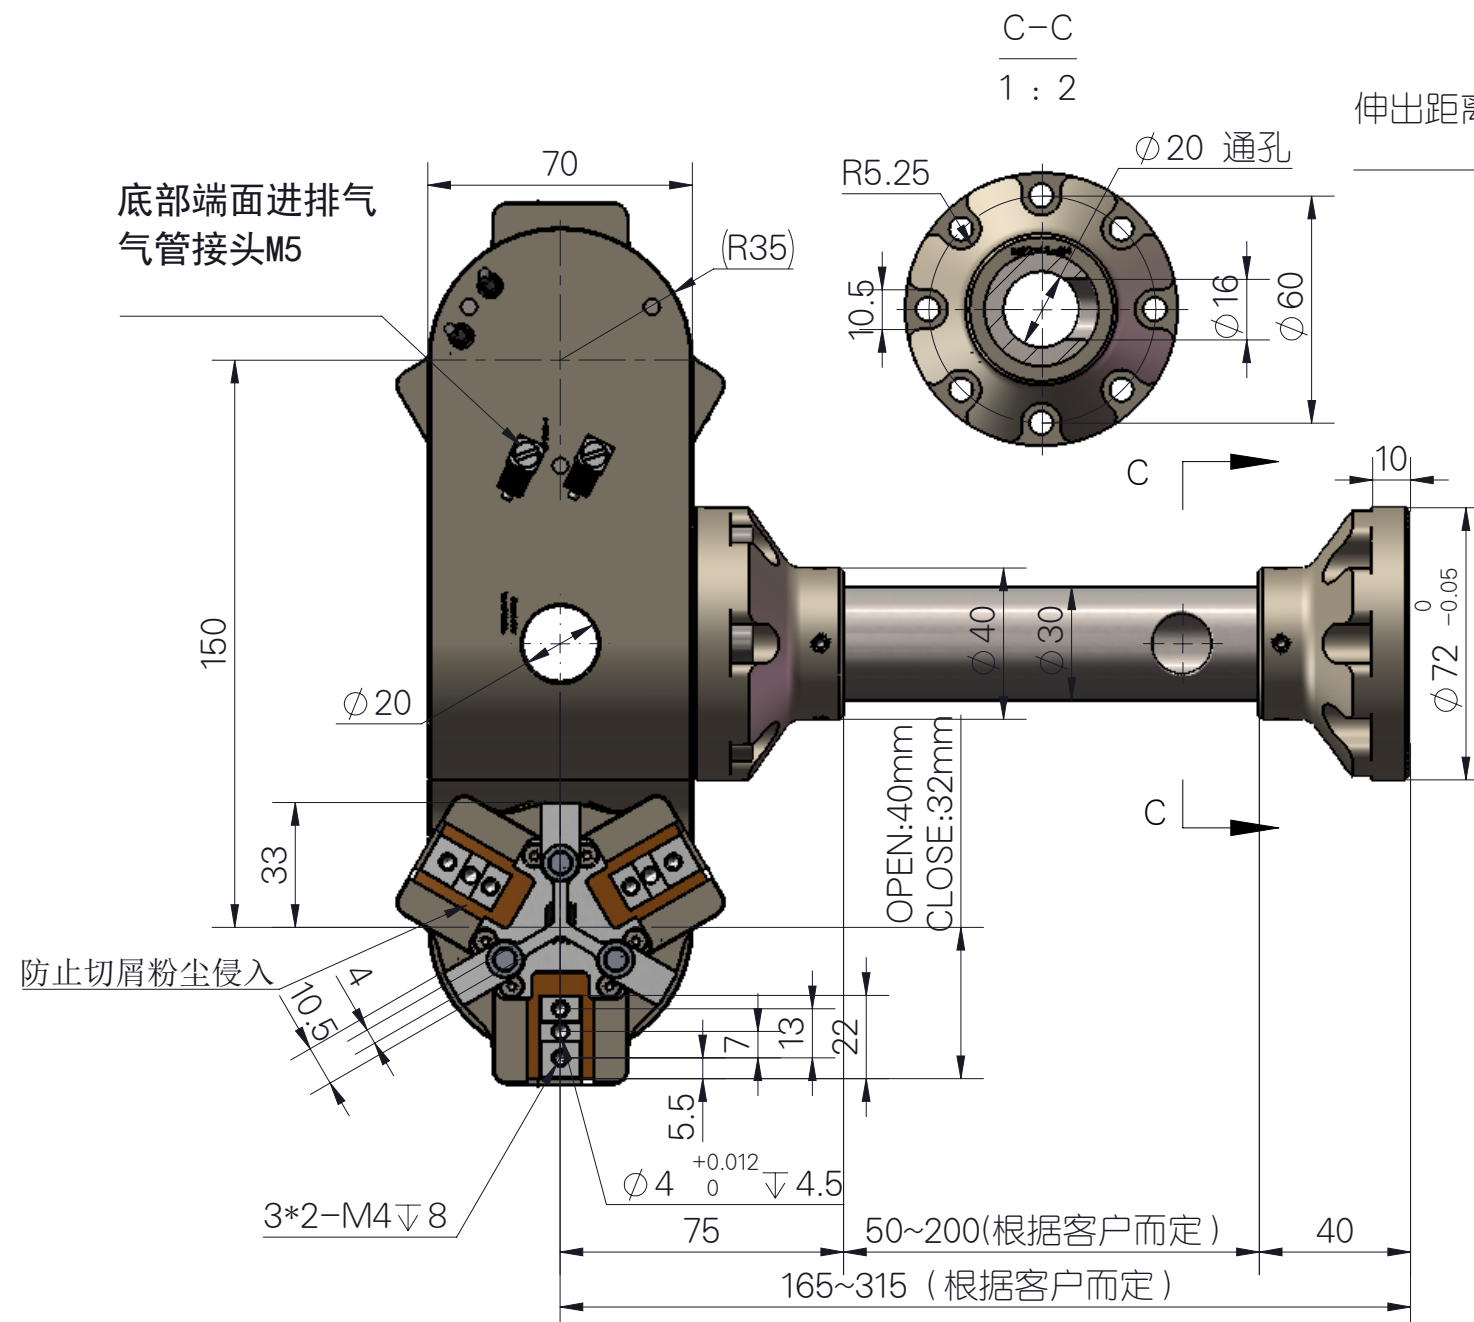

此连接法兰可以根据客户的不同
机器人末端而定制，本图仅为参考

四根气管：PU4X2.5以及
四根磁性开关导线由内部
通过，从该孔中穿出

After 100 consecutive strokes to end positions

After 100 consecutive strokes to end positions