




本设计的结构和技术参数的知识产权归：
浙江梵煜电子科技有限公司所有，在未经
本公司书面许可，不得复制、转让或仿制。
如一经发现复制或仿制将受到法律的严惩。


因改良等原因，规格以及外观有所变更时，不再另行通知，敬请谅解。

推荐的工件重量 (Recommended workpiece weight) : 1.65kg


抓取力, 外夹抓取

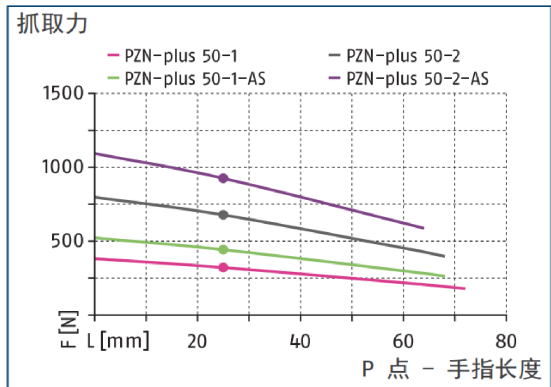

抓取力, 内撑抓取

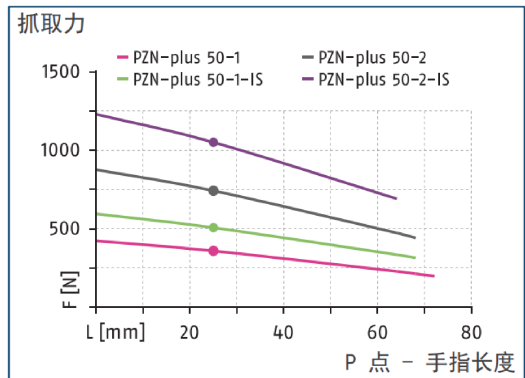

尺寸和最大载荷

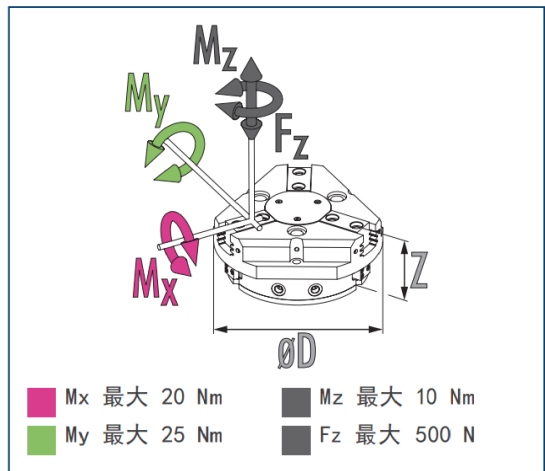

① 所示力矩和力为静态值, 适用于每个基爪, 且可能会同时出现。除抓取力自身产生的力矩外, 还可能产生负载。

名称：气动平行三爪-断气保护-常闭

Name: Pneumatic parallel three claws

型号 (Model) : FY-JGZ Plus-50-1-AS

P:空气压力 (bar) P:Air Pressure(bar)

L:到作用点距离 (mm) L:Exertion Length(mm):20mm

开闭范围 (Stoke) : $2 \times 4 = 8\text{mm}$

产品重量 (Weight):0.35kg

最大附件长度(Max. length attach):68mm

配管接続口(Fitting size):M5-6H

理论夹持力-闭合(Gripping force ·Close)-445N

最小彈簧力 (Minimum spring force) : 120N

单循环空气消耗量(Air consumption per cycle): 18cm³

开关时间(Closing/Opening time) 0.01/0.03sec

重复精度Repeatability: 0.01mm

连续使用次数(Continuation use count): 100

连续使用次数(Continuation usage and
使用年数(Continuation usage and

使用气压(Operating pressure):3-6bar

周围温度(Ambient temperature): -5

潤滑(Lubrication):不需妄 (Needless)

根据IEC60529标准安全防护:IP40

Safety protection according to IEC60529 standard:IP40

所有数据在 6 Bar 时测量 (All data were measured at 6 Bar)

重复精度: 连续动作100次以后的检测值




After 100 consecutive strokes to end positions

警告：


- 1.当操作夹爪工作时，请人员务必远离夹爪和机器人的活动部位，否则将会造成人身伤害的危险；
- 2.由于不同物件有其不同的摩擦系数，当初次夹持工件时，请在空旷场地进行试夹，确保夹稳固后方可装机工作，否则将会有跌落工件砸伤机器或人员的风险

Warning:

1. When operating the gripper, please keep away from it. Gripper and robot's moving parts, otherwise it will Risk of personal injury;
2. Because different objects have different friction coefficients, When clamping the workpiece for the first time, please try clamping in an open field. Ensure that the clamping is firm before the machine can work, otherwise it will There is a risk that falling workpieces may damage machines or personnel.

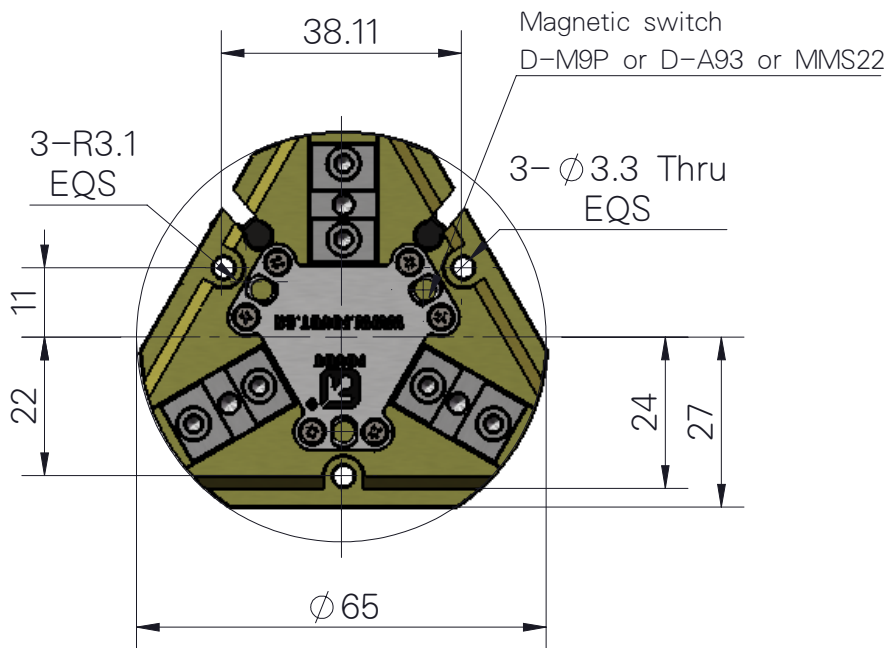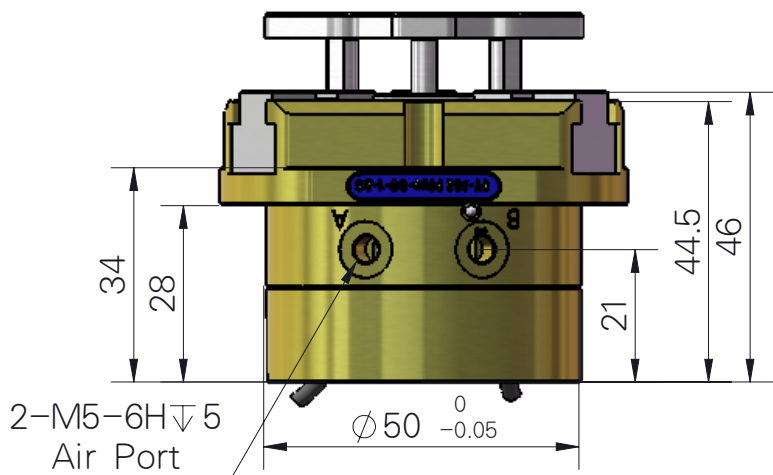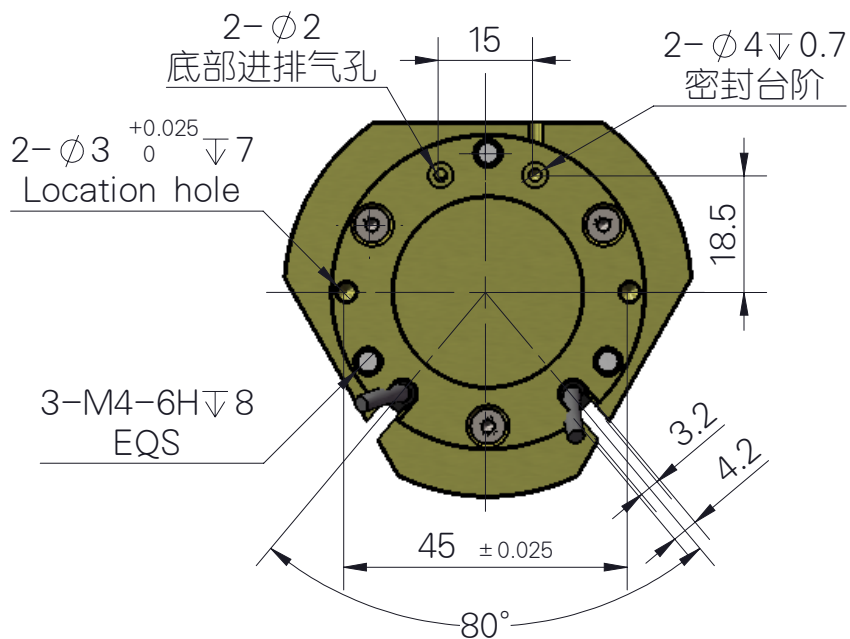

移除推料板

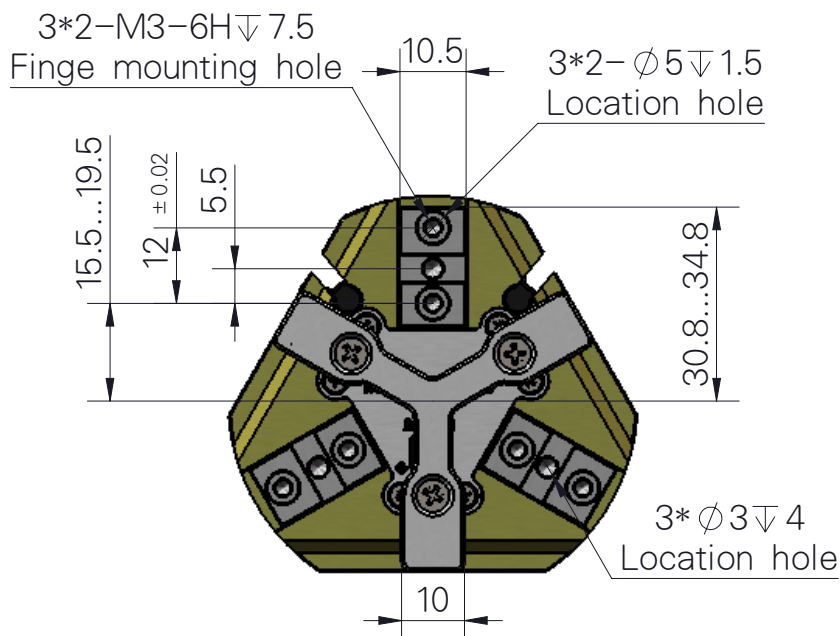

帶推料板

