
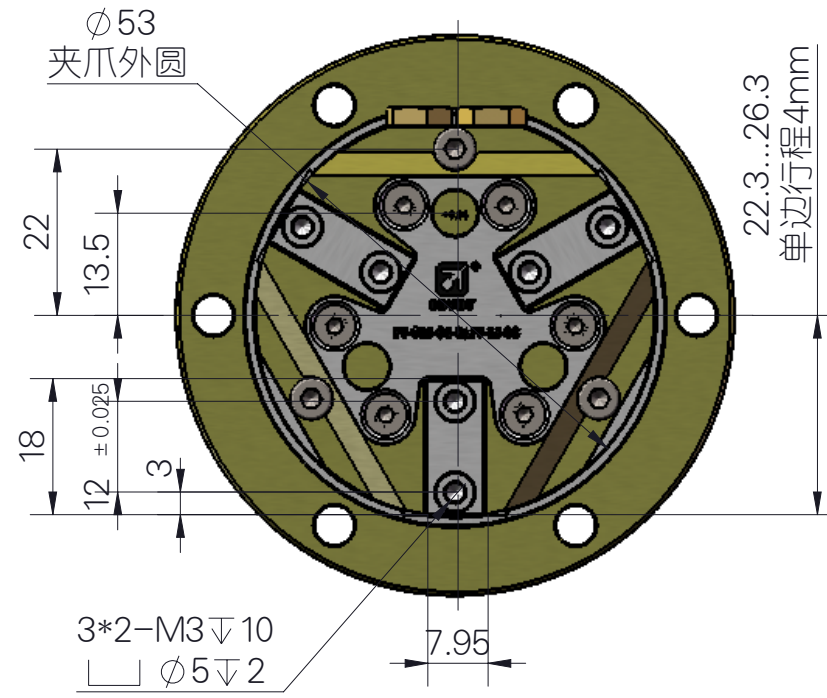
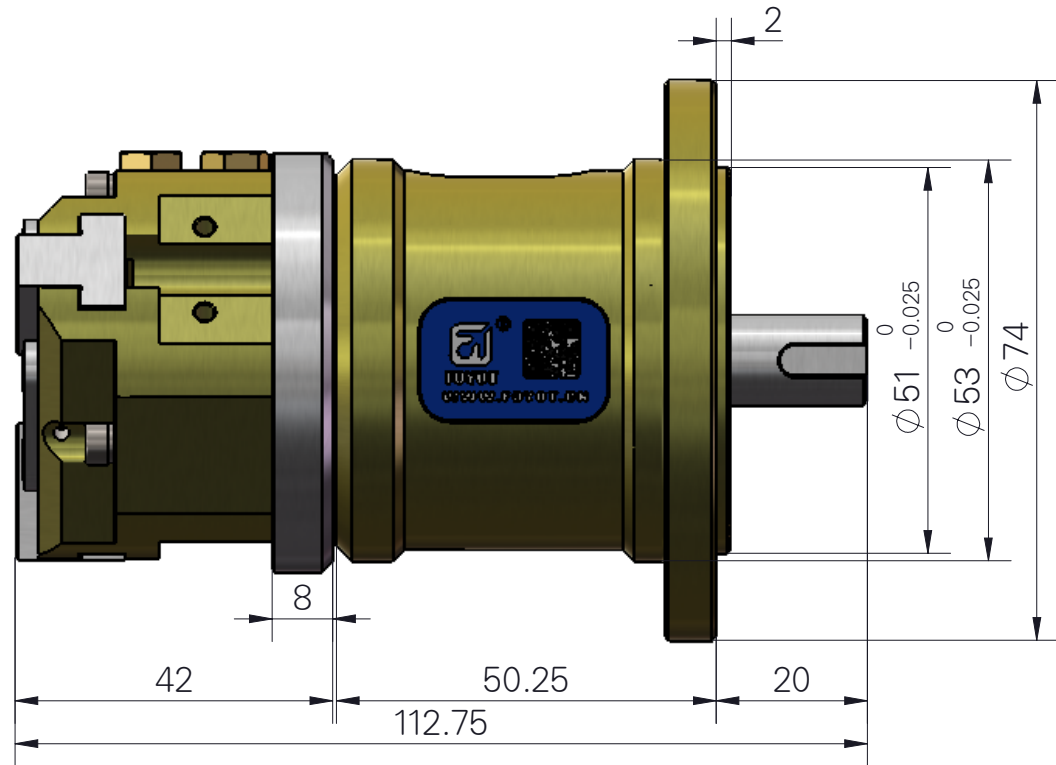


组合件总成型号: FY-CRJ-64-E&FY-TZ-33

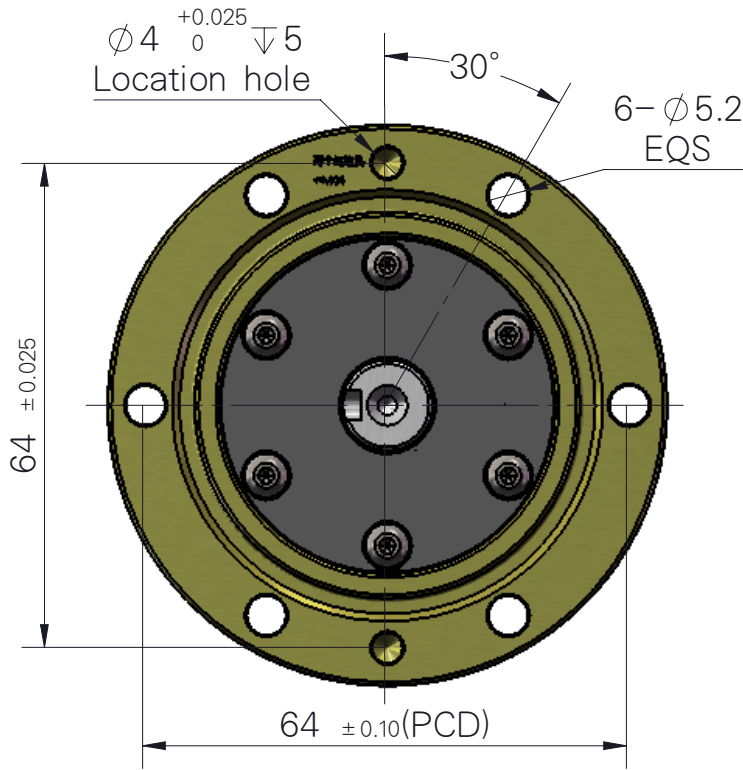

警告:

- 1.当操作夹爪工作时, 请人员务必远离夹爪和机器人的活动部位, 否则将会造成人身伤害的险;
- 2.由于不同物件有其不同的摩擦系数, 当初次夹持工件时, 请在空旷场地进行试夹, 确保夹稳固后方可装机工作, 否则将会有跌落工件砸伤机器或人员的风险

Warning:

- 1.When operating the gripper, please keep away from it Gripper and robot's moving parts, otherwise it will Risk of personal injury;
2. Because different objects have different friction coefficients, When clamping the workpiece for the first time, please try clamping in an open field. Ensure that the clamping is firm before the machine can work, otherwise it will There is a risk that falling workpieces may damage machines or personnel.

无限连续旋转夹爪:(Infinitely continuous swivel Grip)

型号(Model):: FY-CRJ-64-E&FY-TZ-33

输入方式(Input method): 电动或气动(electric or pneumatic)





最高使用转速不大于(The maximum service speed): 300 rpm

最高使用扭矩(Maximum service torque): 20N.m

气压范围(Operating pressure): 3-8bar

整体重量(Overall weight): 0.97kg

夹爪旋转同轴度(Grip rotation coaxiality): 0.05mm

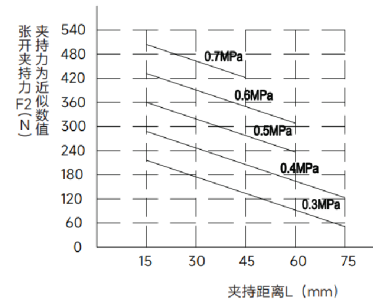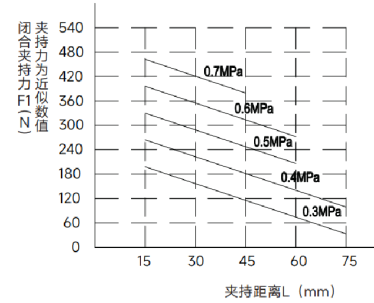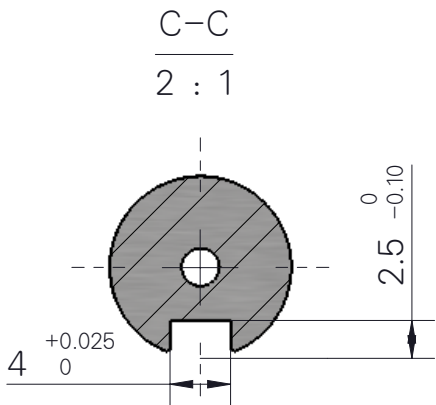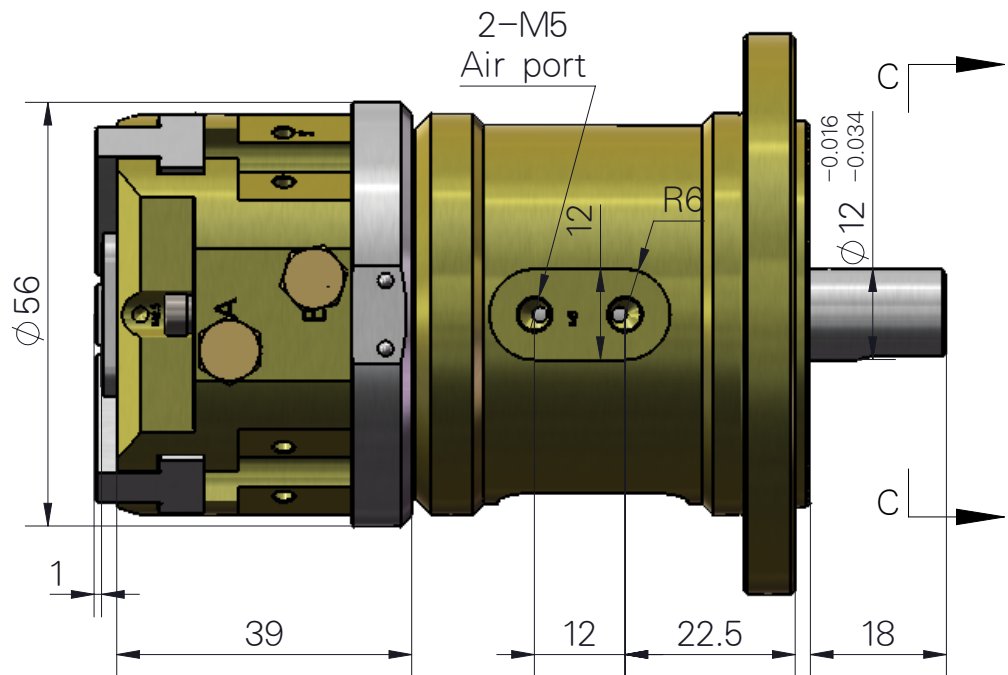

The recommended weight of
The clamping workpiece is: 1.5kg(max)
建议夹持工件的重量为: 1.5kg (max)

夹爪参数:

开闭范围 (Stoke) :8mm

最大手指长度(Max. length Finger):75mm

理论夹持力-开(Gripping force :Open):432N

理论夹持力-闭(Gripping force : Close):396N

开闭时间(Closeing/Opening time):0.02/0.02sec

重复精度Repeat accuracy):0.02mm

连续使用次数(Continuation usage amount):60

使用气压(Operating pressure):3-7bar

周围温度(Ambient temperature): -5 to 60℃ (-10 to 130℃)

润滑(Lubrication):不需要 (Needless)

根据IEC60529标准安全防护:IP45

Safety protection according to IEC60529 standard:IP45

所有数据在6 Bar时测量(All data were measured at 6 Bar)

重复精度: 连续动作100次以后的检测值

After 100 consecutive strokes to end positions